

Omnia pure and ultrapure water systems.



**For demanding applications
in life sciences and labs.**

**For analyser supply,
autoclaves and glassware
washers.**


H₂O – WATER IN ITS PUREST FORM

stakpure

Omnia

Pure and ultrapure water systems Convenient. Compact. Adaptable.

OptiFill Dispenser is standard

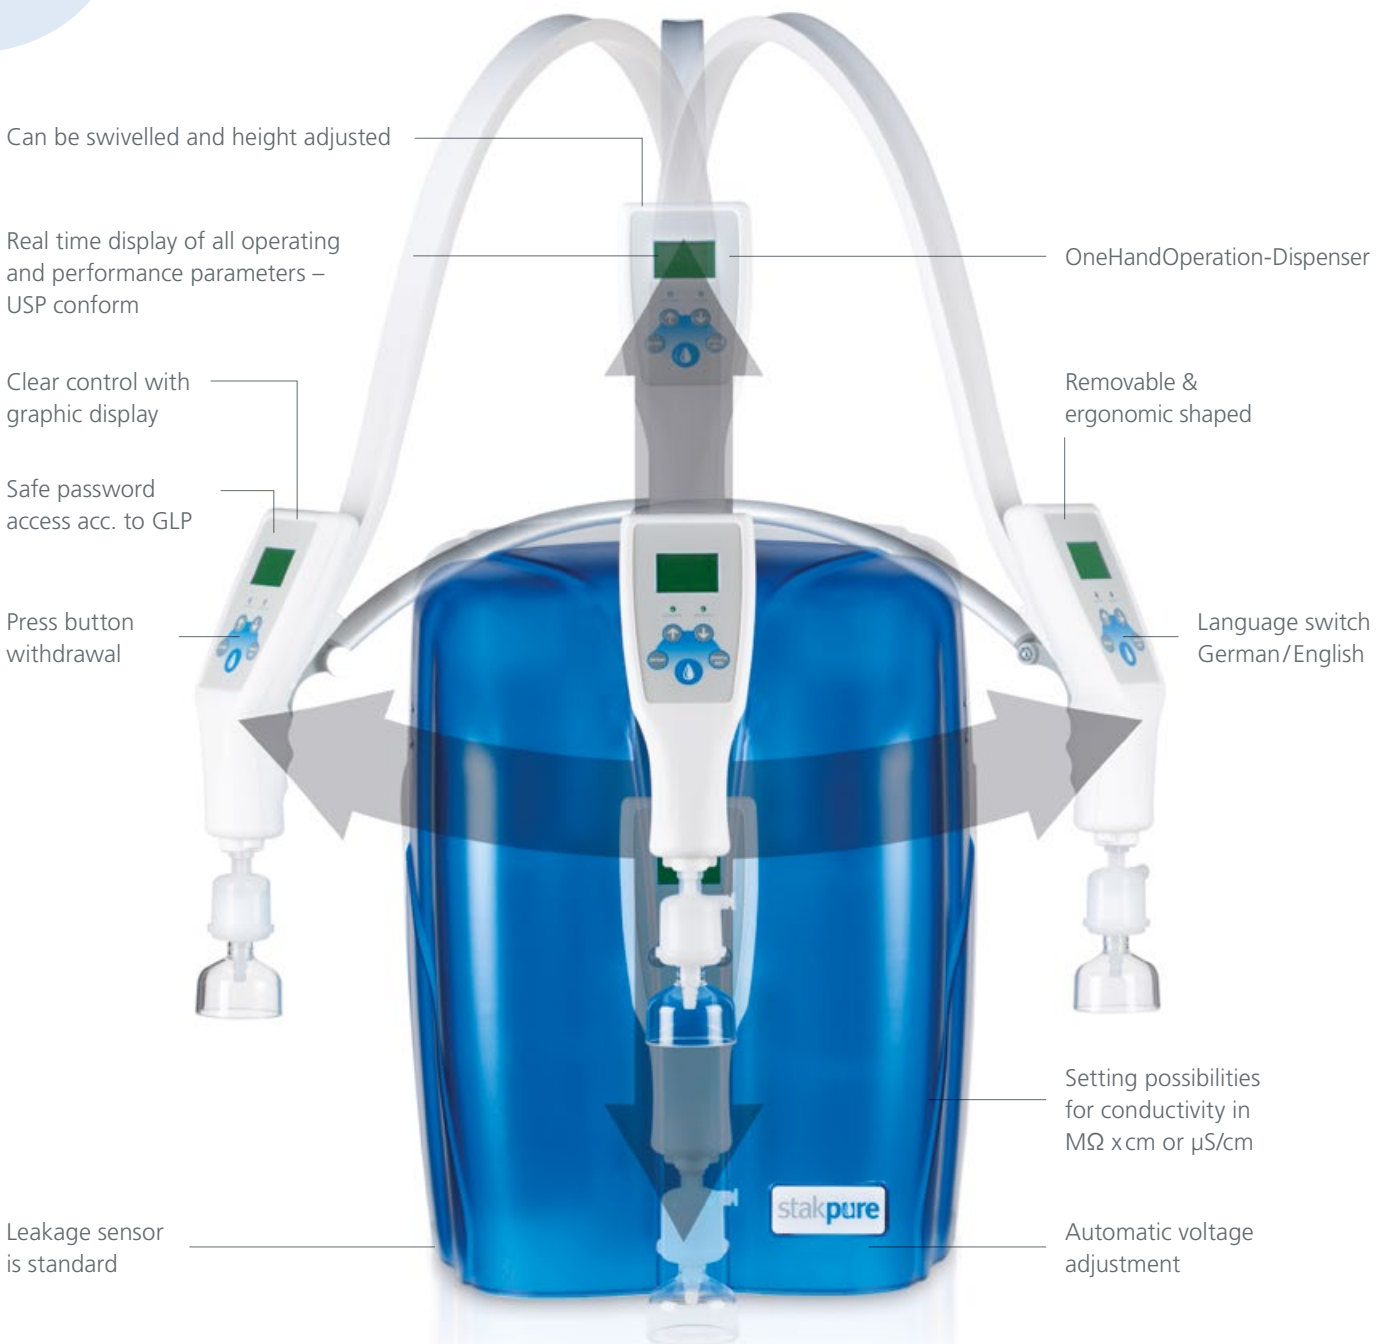

The Omnia series is extremely convenient to use. All devices are fitted with the Optifill one-hand dispenser with integrated control- and monitoring unit. One-handed operation, removable, can be swivelled and height-adjusted, and with a flexible connection for easy water dispensing into any type of container.



The ergonomic shaped dispenser is easily operable.



The easily accessible control and service cover ensures that consumables can be replaced in seconds.



Separate from the production unit. The external dispenser can be space sparingly wall-fitted or flexibly placed on the lab bench.

Place the production unit under the bench to save valuable space in your lab. Match the positioning to your lab environment with the external OptiFill stand/wall dispenser and monitoring unit. Either practical on a bench or space-saving on a wall.



OmniaTap

The Allrounder.

For H₂O pure types I + II.

OmniaTap is the ideal system when both pure water and ultrapure water are required, but in relatively small amounts. The ability to provide both types from a single system results from the combination of ultramodern purification technologies. These also make it possible to connect the system directly to tap water. A press on the dispenser button activates dispensing of ultrapure water type I via the digital dispenser control. The recirculation of the pure water held in the installed 10 litre tank keeps it permanently at type II quality. The pure water tank has a second outlet for feeding downstream end users.

Features

- OptiFill dispenser is standard
- Pretreatment set for direct connection to tap water
- 10-litres pure water tank
- Tank volume display in percent
- Simple and economical filter replacement
- Leakage sensor is standard
- Ready-to-use, including filter cartridges



One hand operation



Easy water dispensing



Flexible on a work surface

Specifications	OmniaTap	OmniaTap UV	OmniaTap UV/UF
Type II			
Pure water performance l/h at 15 °C	12 or 20	12 or 20	12 or 20
Conductivity [$\mu\text{S}/\text{cm}$]	0.067–0.1	0.067–0.1	0.067–0.1
Resistance [$\text{M}\Omega \times \text{cm}$]	15–10	15–10	15–10
Pure water tank pressurized outlet	optional	optional	optional

Type I			
Conductivity [$\mu\text{S}/\text{cm}$]	0.055	0.055	0.055
Resistance [$\text{M}\Omega \times \text{cm}$]	18.2	18.2	18.2
TOC-value* [ppb]	< 10	< 5	< 5
Dispensing performance [l/min.]	up to 2	up to 2	up to 1.6
Endotoxins* [EU/ml]	-	-	< 0.001
Particles** [1/ml]	< 1	< 1	< 1
Bacteria** [CFU/ml]	< 0.1	< 0.1	< 0.1

Feedwater requirements

Tap water according to DIN 2000

Feedwater temperature [°C]	+2 up to 35	+2 up to 35	+2 up to 35
Manganese and iron content [mg/l]	< 0.05	< 0.05	< 0.05
Free chlorine content [mg/l]	< 0.1	< 0.1	< 0.1
Silt density index (SDI)	max. 3	max. 3	max. 3

Technical data

Operating pressure [bar]	2–6	2–6	2–6
Supply voltage [Volt/Hz]	90–240/50–60	90–240/50–60	90–240/50–60
Connected load [kW]	0.1	0.1	0.1
Connector size	3/4"	3/4"	3/4"
Ambient temperature [°C]	+2 up to +35	+2 up to +35	+2 up to +35
Dimensions*** [W x H x D mm]	390 x 720 x 615	390 x 720 x 615	390 x 720 x 615
Weight [kg]	20	21	21


* in dependence on the feedwater quality

** with sterilizing filter 0.2 μm

*** with OptiFill Dispenser

Article no.	System type*	Typical applications	Accessories
18200101	OmniaTap 12	AAS, IC, ICP, buffers and media preparation	19200300 Wall mount Omnia
18200201	OmniaTap 20	AAS, IC, ICP, buffers and media preparation	19200056 Disinfection kit Omnia
18200102	OmniaTap 12 UV	Ultra-trace analysis, ICP-MS, HPLC, TOC	19200057 Disinfectant Omnia
18200202	OmniaTap 20 UV	Ultra-trace analysis, ICP-MS, HPLC, TOC	19200021 Pre-treatment unit OmniaTap –10"
18200103	OmniaTap 12 UV/UF	Life science and microbiology, cell culture media	
18200203	OmniaTap 20 UV/UF	Life science and microbiology, cell culture media	

* RO cartridge, ultrapure water cartridge, sterile filter capsule 0.2 μm , sterile overflow and sterile vent filter included

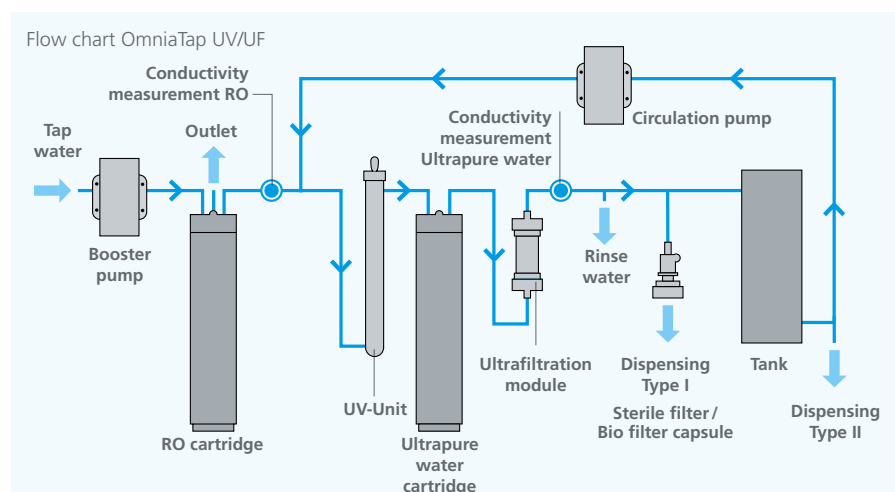

OmniaLab^{ED+}

The big one.

For H₂O pure types I + II.

OmniaLab^{ED+} is the system of choice when both pure water and ultrapure water are needed for the entire laboratory. The system complies with international water standards such as ASTM, ISO 3696 and CLSI. The economy of it is maximized by the inclusion of a continuously self-regenerating electrodeionizer, without having to give any demanding analytical applications a pass. Further to this, the OmniaLab^{ED+}-system holds 100 liters of pure water Type II ready for withdrawal in a storage tank with quality recirculation. It is so predestined for supplying autoclaves or lab washing machines and the dispensing of Type 1 ultra pure water for analytical and bioscience applications.

Features

- OptiFill dispenser is standard
- Continuous residual salts removal by electro-deionization
- 100 litre storage tank with recirculation and pressure outlet
- Tank volume display in percent
- Tank volume can be modularly increased
- Simple, cost-effective filter replacement
- Leakage sensor is standard



One hand operation



Easy water dispensing



Flexible on a work surface



Tank fits space-savingly under the bench-top

Specifications	OmniaLab ^{ED+20}	OmniaLab ^{ED+40}
Type II		
Pure water performance l/h at 15 °C	20	40
Conductivity [$\mu\text{S}/\text{cm}$]	0.067–1	0.067–1
Resistance [$\text{M}\Omega \times \text{cm}$]	15–1	15–1
Silicate removal* [%]	99.9	99.9
Pure water tank pressurized outlet	optional	optional
Type I		
Conductivity [$\mu\text{S}/\text{cm}$]	0.055	0.055
Resistance [$\text{M}\Omega \times \text{cm}$]	18.2	18.2
TOC-value* [ppb] (with UV-unit)	1–5	1–5
Dispensing performance dispenser [l/min.]	up to 2	up to 2
Particles** [1/ml]	< 1	< 1
Bacteria** [CFU/ml]	< 0.1	< 0.1

Feedwater requirements

Softened water according to DIN 2000		
Feedwater temperature [°C]	+2 up to 35	+2 up to 35
Manganese and iron content [mg/l]	< 0.05	< 0.05
Free chlorine content [mg/l]	< 0.1	< 0.1
Silt density index (SDI)	max. 3	max. 3

Technical data

Operating pressure [bar]	2–6	2–6
Supply voltage [Volt/Hz]	90-240/50-60	90-240/50-60
Connected load [kW]	0.25	0.25
Connector size	3/4"	3/4"
Ambient temperature [°C]	+2 up to +35	+2 up to +35
Dimensions Tower*** [W x H x D mm]	511 x 1520 x 575	511 x 1520 x 575
Dimensions Base cabinet tank [mm]	511 x 800 x 575	511 x 800 x 575
Weight [kg]	43	43

* in dependence on the feedwater quality



** with sterilizing filter 0.2 μm

*** with OptiFill Dispenser

Article no.	System type*	Typical applications
18700020	OmniaLab ^{ED+20}	Feedwater for autoclaves and laboratory washers
18700040	OmniaLab ^{ED+40}	Feedwater for autoclaves and laboratory washers

* RO cartridge, ultrapure water cartridge, sterile filter capsule 0.2 μm , sterile overflow and sterile vent filter + CO₂ absorber included

Accessories	
16125000	Water softener MixMulti 32
19200021	Pre-treatment unit OmniaLab – 10"
19200050	UV Flow through disinfection – 254 nm
19200052	UV Unit for TOC reduction – 254 nm
16561201	External pressure booster pump SC 3000

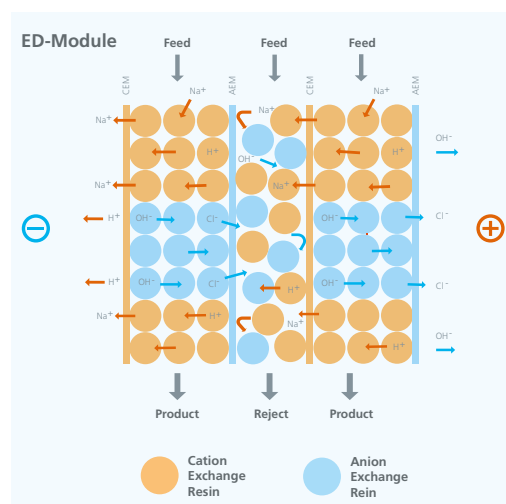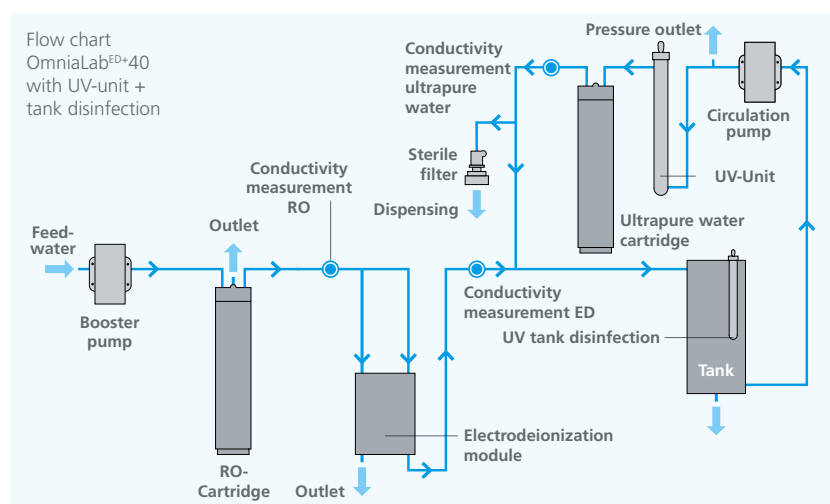

OmniaLab^{ED}

The efficient one. For H₂O pure type II.

OmniaLab^{ED} is the efficient solution when high quality pure water Type II is required for the complete lab supply. It is compliant with international water standards, such as ASTM, ISO 3696, CLRW (CLSI), and the combination with continual self-regenerating electro-deionization brings maximized economy. Further to this, the OmniaLab^{ED} system holds 100 liters of pure water in a storage tank with quality recirculation, ready to supply lab equipment. OmniaLab^{ED} is the efficient one for supplying autoclaves, lab machines and ultra-pure water systems.

Features

- OptiFill dispenser is standard
- Continuous residual salts removal by electro-deionization
- 100 litre storage tank with recirculation and pressure outlet
- Tank volume display in percent
- Tank volume can be modularly increased
- Simple, cost-effective filter replacement
- Leakage sensor is standard



One hand operation



Easy water dispensing



Flexible on a work surface



Tank fits space-savingly under the bench-top

Specifications	OmniaLab ^{ED} 20	OmniaLab ^{ED} 40
Type II		
Pure water performance l/h at 15 °C	20	40
Conductivity [µS/cm]	0.1–1	0.1–1
Resistance [MΩ x cm]	10–1	10–1
TOC-value* [ppb]	< 30	< 30
Silicate removal* [%]	> 99	> 99
Dispensing performance dispenser [l/min.]	up to 2	up to 2
Particles** [1/ml]	< 1	< 1
Bacteria** [CFU/ml]	< 0.1	< 0.1
Pure water tank pressurized outlet	optional	optional

Feedwater requirements

Softened water according to DIN 2000		
Feedwater temperature [°C]	+2 up to 35	+2 up to 35
Manganese and iron content [mg/l]	< 0.05	< 0.05
Free chlorine content [mg/l]	< 0.1	< 0.1
Silt density index (SDI)	max. 3	max. 3

Technical data

Operating pressure [bar]	2–6	2–6
Supply voltage [Volt/Hz]	90-240/50-60	90-240/50-60
Connected load [kW]	0.25	0.25
Connector size	3/4"	3/4"
Ambient temperature [°C]	+2 up to +35	+2 up to +35
Dimensions Tower*** [W x H x D mm]	511 x 1520 x 575	511 x 1520 x 575
Dimensions Base cabinet tank [mm]	511 x 800 x 575	511 x 800 x 575
Weight [kg]	41	41

* in dependence on the feedwater quality



** with sterilizing filter 0.2 µm

*** with OptiFill Dispenser

Article no.	System type*	Typical applications
18700021	OmniaLab ^{ED} 20	Feedwater for autoclaves, laboratory washers and ultrapure water systems
18700041	OmniaLab ^{ED} 40	Feedwater for autoclaves, laboratory washers and ultrapure water systems

* RO cartridge, sterile filter capsule 0.2 µm, sterile overflow and sterile vent filter + CO₂ absorber included

Accessories	
16125000	Water softener MixMulti 32
19200020	Pre-treatment unit OmniaLab – 10"
19200050	UV Tank disinfecting unit 254 nm
19200051	UV Flow through disinfection 254 nm
16561201	External pressure booster pump SC 3000

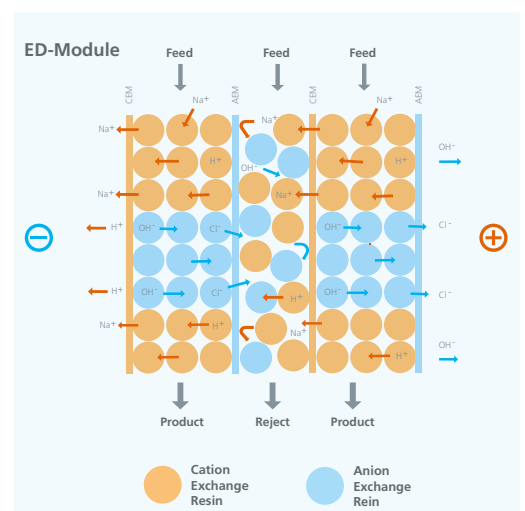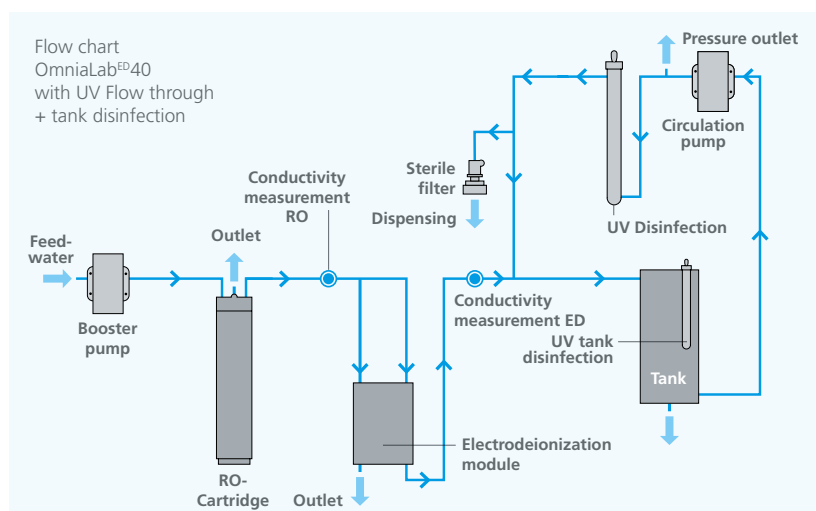

OmniaLab^{UP}

The constant one. For H₂O pure type II.

OmniaLab^{UP} is the system of choice when you need a constant supply of high-quality water in laboratories. For this, OmniaLab^{UP} holds 100 litres of type II pure water in reserve in a storage tank with quality recirculation. It is an optimal supplier to autoclaves, lab rinsing machines and ultrapure water systems. The water produced conforms to international medical technology water standards such as ASTM, ISO 3696 and CLRW (CLSI).

Features

- OptiFill Dispenser is standard
- 100 l tank with quality recirculation and pressure outlet
- Tank volume display in percent
- Tank volume can be modularly increased
- Simple, cost-effective filter replacement
- Leakage sensor is standard



One hand operation



Easy water dispensing



Flexible on a work surface



Tank fits space-savingly under the bench top

Specifications	OmniaLab ^{UP} 20	OmniaLab ^{UP} 40
Type II		
Pure water performance l/h at 15 °C	20	40
Conductivity [µS/cm]	0.067–0.1	0.067–0.1
Resistance [MΩ x cm]	15–10	15–10
Dispensing performance dispenser [l/min.]	up to 2	up to 2
Particles* [1/ml]	< 1	< 1
Bacteria* [CFU/ml]	< 0.1	< 0.1
Pure water tank pressurized outlet	optional	optional

Feedwater requirements

Softened or hardness-stabilized water according to DIN 2000

Feedwater temperature [°C]	+2 up to 35	+2 up to 35
Manganese and iron content [mg/l]	< 0.05	< 0.05
Free chlorine content [mg/l]	< 0.1	< 0.1
Silt density index (SDI)	max. 3	max. 3

Technical data


Operating pressure [bar]	2–6	2–6
Supply voltage [Volt/Hz]	90-240/50-60	90-240/50-60
Connected load [kW]	0.1	0.1
Connector size	3/4"	3/4"
Ambient temperature [°C]	+2 up to +35°C	+2 up to +35°C
Dimensions Tower** [W x H x D mm]	511 x 1520 x 575	511 x 1520 x 575
Dimensions Base cabinet tank [mm]	511 x 800 x 575	511 x 800 x 575
Weight [kg]	40	40

* with sterilizing filter 0.2 µm ** with OptiFill Dispenser

Article no.	System type*	Typical applications
18600020	OmniaLab ^{UP} 20	Feedwater for autoclaves and laboratory washers
18600040	OmniaLab ^{UP} 40	Feedwater for autoclaves and laboratory washers

* RO cartridge, pure water cartridge, sterile filter capsule 0.2 µm, sterile overflow and sterile vent filter + CO₂ absorber included.

Accessories	
19200020	Pre-treatment unit OmniaLab – 10"
19200050	UV tank disinfection unit 254 nm
19200051	UV Flow through disinfection 254 nm
16561201	External pressure booster pump SC 3000

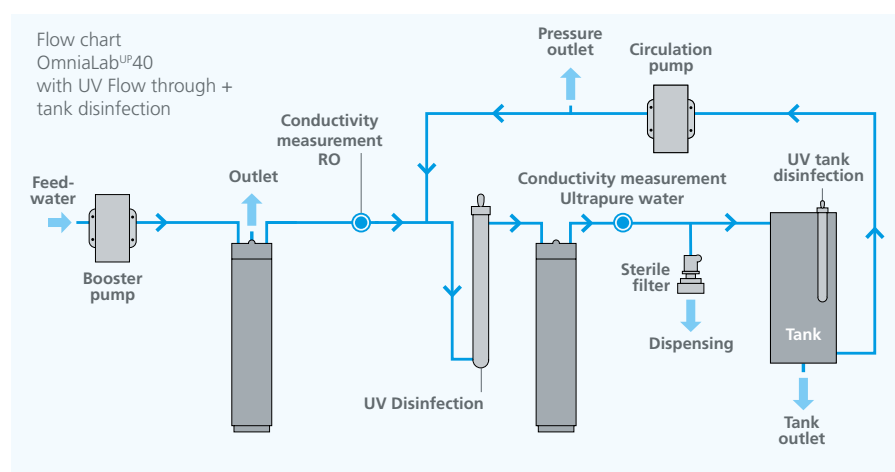

OmniaLab^{DS}

The reliable one.

For H₂O pure type II +
CLRW (CLSI).

When safety is first priority and the quality of the purification decides the quality of results, then the OmniaLab^{DS} system is the perfect solution. Even for large pure water quantities of up to 80 l/h, OmniaLab^{DS} guarantees international water standards compliance. The combination of regenerative polishing cartridge and an optional emergency supply makes this system extremely reliable for supplying clinical analytical systems, as well as for feeding water to steam sterilizers and washer-disinfectors.

Features

- OptiFill Dispenser is standard
- 100 l tank with quality recirculation and pressure outlet
- Tank volume display in percent
- Tank volume can be modularly increased
- Simple, cost-effective filter replacement
- Leakage sensor is standard
- Emergency supply (optional)
- Degassing unit (optional)



One hand operation



Easy water dispensing



Flexible on a work surface



Tank fits space-savingly under the bench top



Specifications	OmniaLab ^{DS} 20	OmniaLab ^{DS} 40	OmniaLab ^{DS} 60
Type II + CLRW (CLSI)			
Pure water performance l/h at 15 °C	20	40	60
Conductivity [$\mu\text{S}/\text{cm}$]	0.1–1.0	0.1–1.0	0.1–1.0
Resistance [$\text{M}\Omega \times \text{cm}$]	10–1	10–1	10–1
Dispensing performance dispenser [l/min.]	up to 2	up to 2	up to 2
Particles* [1/ml]	< 1	< 1	< 1
Bacteria* [CFU/ml]	< 0.1	< 0.1	< 0.1
Pure water tank pressurized outlet	optional	optional	optional

Feedwater requirements

Softened or hardness-stabilized water according to DIN 2000

Feedwater temperature [°C]	+2 up to 35	+2 up to 35	+2 up to 35
Manganese and iron content [mg/l]	< 0.05	< 0.05	< 0.05
Free chlorine content [mg/l]	< 0.1	< 0.1	< 0.1
Silt density index (SDI)	max. 3	max. 3	max. 3

Technical data


Operating pressure [bar]	2–6	2–6	2–6
Supply voltage [Volt/Hz]	90-240/50-60	90-240/50-60	90-240/50-60
Connected load [kW]	0.1	0.1	0.1
Connector size	3/4"	3/4"	3/4"
Ambient temperature [°C]	+2 up to +35	+2 up to +35	+2 up to +35
Dimensions Tower** [W x H x D mm]	511 x 1520 x 575	511 x 1520 x 575	511 x 1520 x 575
Dimensions Base cabinet tank [mm]	511 x 800 x 575	511 x 800 x 575	511 x 800 x 575
Weight [kg] (without polishing cartridge)	39	39	40

* with sterilizing filter 0.2 μm ** with OptiFill Dispenser

Article no.	System type*	Typical applications
18800020	OmniaLab ^{DS} 20	Feedwater for analyzers, autoclaves and laboratory washers
18800040	OmniaLab ^{DS} 40	Feedwater for analyzers, autoclaves and laboratory washers
18800060	OmniaLab ^{DS} 60	Feedwater for analyzers, autoclaves and laboratory washers

* RO cartridge, stainless steel polishing cartridge, sterile filter capsule 0.2 μm , sterile overflow and sterile vent filter + CO_2 absorber included

Accessories	
19200020	Pre-treatment unit OmniaLab – 10"
19200050	UV tank disinfection unit 254 nm
19200051	UV Flow through disinfection 254 nm
12280050	Replacement/second polishing cartridge type DS 2800 RV
19200040	Emergency supply
19200041	Degassing unit
16561201	External pressure booster pump SC 3000

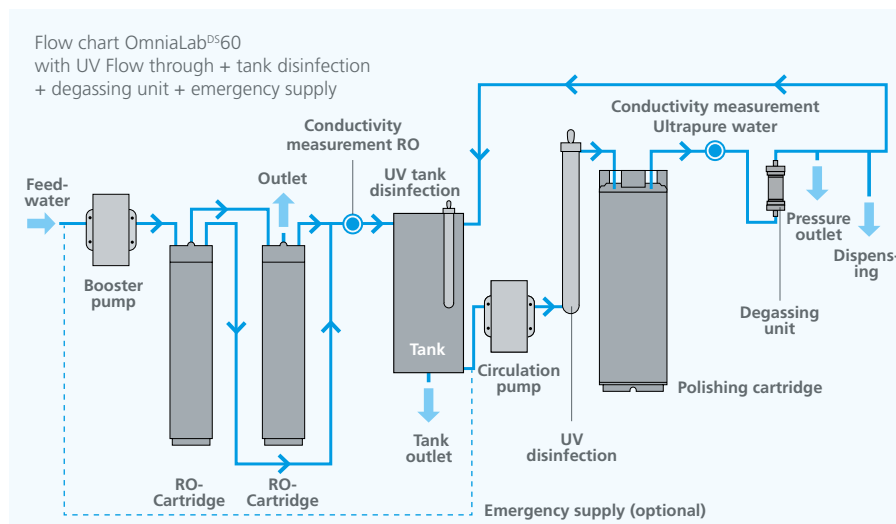

OmniaLab^{RO}

The big one.

For H₂O pure type III.

OmniaLab^{RO} fulfils your requirement when you have a need of a constant large volume of reverse osmosis water. For this, OmniaLab^{RO} holds 100 litres in reserve in a storage tank. It is an optimal supplier to autoclaves, lab rinsing machines, air humidifiers and ultrapure water systems.

Features

- OptiFill Dispenser is standard
- With 100 l pure water tank
- Tank volume display in percent
- Tank volume can be modularly increased
- Leakage sensor is standard



One hand operation



Easy water dispensing



Flexible on a work surface




Tank fits space-savingly under the bench top

Specifications	OmniaLab [®] 20	OmniaLab [®] 40	OmniaLab [®] 60
Type III			
Pure water performance l/h at 15 °C	20	40	60
RO membrane retention rate in % (ions, germs and bacteria)	> 98	> 98	> 98
Feedwater requirements			
Softened or hardness-stabilized water according to DIN 2000			
Feedwater temperature [°C]	+2 up to 35	+2 up to 35	+2 up to 35
Manganese and iron content [mg/l]	< 0.05	< 0.05	< 0.05
Free chlorine content [mg/l]	< 0.1	< 0.1	< 0.1
Silt density index (SDI)	max. 3	max. 3	max. 3
Technical data			
Operating pressure [bar]	2–6	2–6	2–6
Supply voltage [Volt/Hz]	90-240/50-60	90-240/50-60	90-240/50-60
Connected load [kW]	0.1	0.1	0.1
Connector size	3/4"	3/4"	3/4"
Ambient temperature [°C]	+2 up to +35	+2 up to +35	+2 up to +35
Dimensions Tower** [W x H x D mm]	511 x 1520 x 575	511 x 1520 x 575	511 x 1520 x 575
Dimensions Base cabinet tank [mm]	511 x 800 x 575	511 x 800 x 575	511 x 800 x 575
Weight [kg]	38	38	40

* with OptiFill Dispenser

Article no.	System type	Typical applications
18500020	OmniaLab [®] 20	Feedwater for autoclaves and laboratory washers, ultrapure water systems and air humidifiers
18500040	OmniaLab [®] 40	Feedwater for autoclaves and laboratory washers, ultrapure water systems and air humidifiers
18500060	OmniaLab [®] 60	Feedwater for autoclaves and laboratory washers, ultrapure water systems and air humidifiers

Accessories	
19200020	Pre-treatment unit OmniaLab – 10"
19200050	UV tank disinfection unit 254 nm
16561201	External pressure booster pump SC 3000

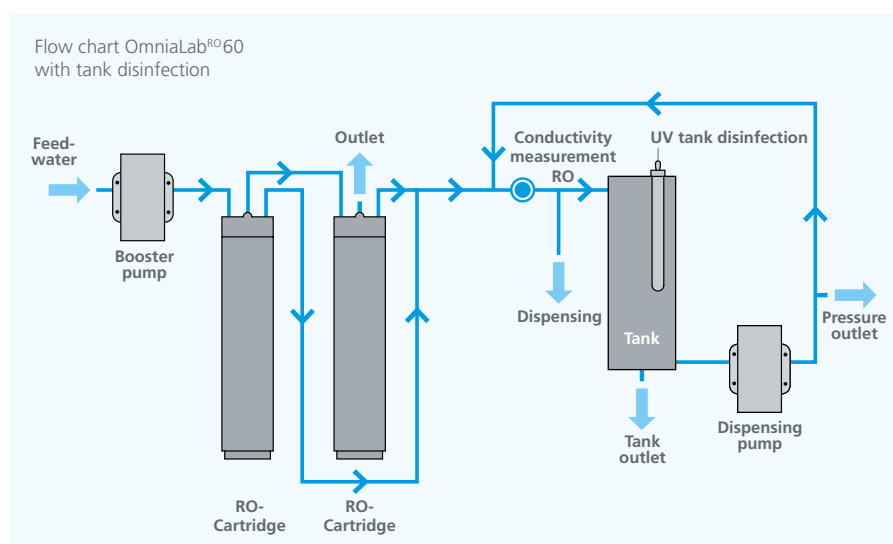

stakpure

stakpure GmbH

Auf dem Kesseling 11

D 56414 Niederahr

Phone: +49 (0) 2602 10673-0

Fax: +49 (0) 2602 10673-200

info@stakpure.de

www.stakpure.de



We are certified according to ISO 9001: 2015

Is reliable and economic preparation of pure and/or ultrapure water a topic for you? Just call us!

info@stakpure.com
www.stakpure.de

Retailer panel